




Monitor arm STOCKHOLM Duo Part - 1

Follow instructions, and if there are steps that are incomprehensible, please let us know and we will get back to you. **Note! All necessary parts may be found in separate boxes.**


Part Check-List

STEP 1

1A		x1	5	 (2 mm)	x1
1B		x1	STEP 3		
2A		x2	6A	 (M4x10)	x4
2B		x2	6B	 (M4x15)	x4
3A	 (M6x12)	x2	7		x4
3B	 (M6x15)	x2	STEP 4		
4	 (5 mm)	x1	8		x1
			TOOLS NEEDED		
			(Not included)		
			 (13 mm)		

STEP 1



Hook the bracket 1A into the track of your compatible aluminium profile (See **STEP 2** for compatibility). Combine bracket with monitor arm 1B and secure its position with Allen key 5.

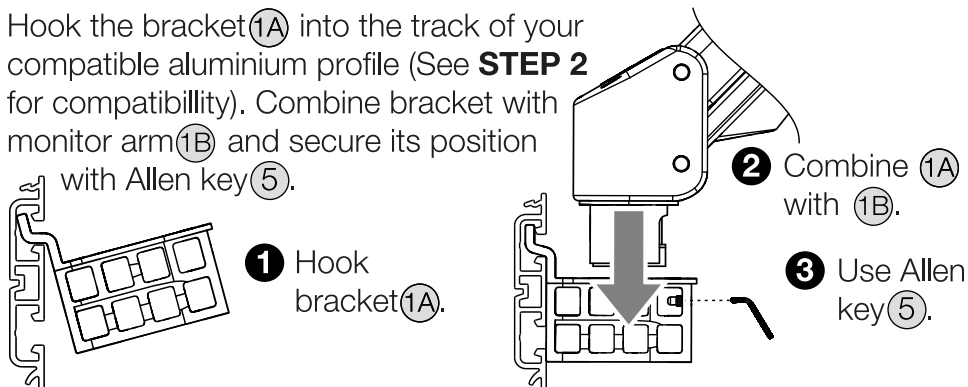

Assembly Guide



Conceptum M-Profile

436-MX

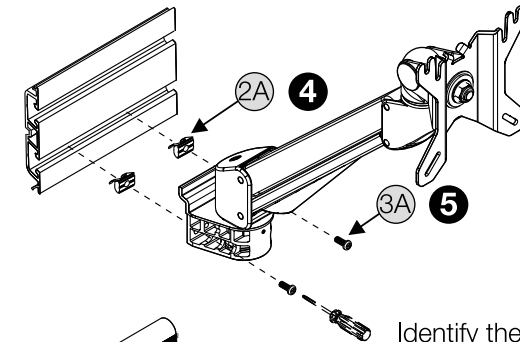





F-Profile

436-FX100




Identify the correct nuts and screws using the boxes. Then, fixate the monitor arms to the desired position on the aluminum profile.

Other possible assemblies



Insert the nut with the blocky side towards yourself and the rounded side towards the aluminum profile for best grip (as illustrated to the left). Once inserted, make sure to center and align the components before fastening the screws (as illustrated to the right).




Assembly Guide

STEP 3

If the VESA mount fits with the monitor, proceed with the usage of screws **6A**. (See left side illustration below).

In case it does not, assembly using the distance nuts **7** and long screws **6B**. This is usually the case with screens that have a sunken VESA surface (see right side illustration below).

Secure the assembly with a screwdriver (not provided).



6A



1 Mount both upper screws half-way into the threads of the monitor.

2 Slide the upper screws onto the tracks of the monitor's VESA bracket.

3 Fasten all four screws to the monitor arm.

6B



7



1 Fasten all the nuts and screws onto the VESA bracket.



2 Grip firmly and position the monitor with the monitor's VESA bracket. Fasten all screws.

www.kondator.se

Assembly Guide

STEP 4

Unattach the small cable collector and route the cables through. Once satisfied, re-attach the collector back into place, and cover the bottom bracket with the cover **8**.

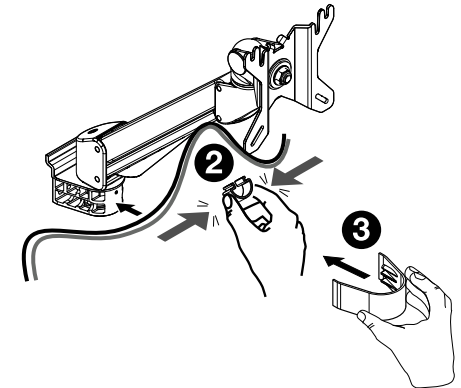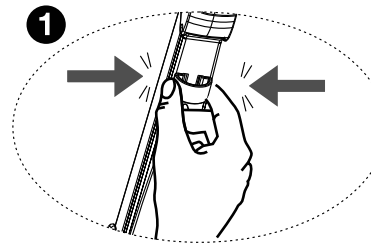

User Manual

438-LC59

Monitor arm STOCKHOLM Duo Part - 2

Follow instructions, and if there are steps that are incomprehensible, please let us know and we will get back to you. **Note! All necessary parts may be found in separate boxes.**

Part Check-List


1		x1
2		x2
3	(M6x12)	x12

4		x4
5		x4
6		x8
TOOLS NEEDED (Not included)		
	(14 mm)	x2


Assembly Guide

STEP 5

Mount the Dual bar (1) to the arm (1B). Lift the bar into monitor and pass the screws (3) through one by one. If necessary use the washers (4) and fasten using the using the nuts (5).


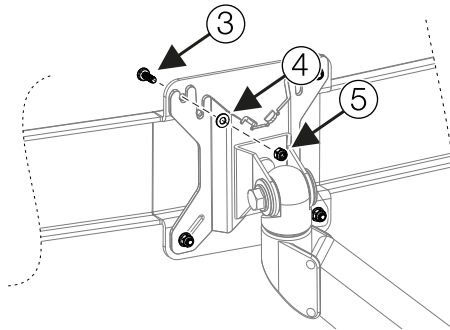


Place the LCD monitor face down on a flat surface. Align the VESA bracket (2) holes and fasten using screws (3). Repeat procedure for both LCD monitors.

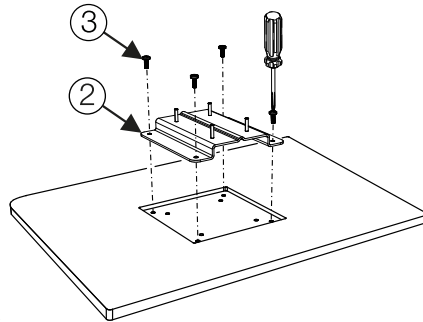

Lift the VESA bracket with the mounted LCD monitor, and examine how close the monitor can be to the center of the bar (see step 6). Then, insert the VESA bracket pins into the track of the bar and lock them to the track using the knob nuts (6). Angle the monitor as you see fit. Repeat procedure for both VESA brackets.

Turn nuts clockwise

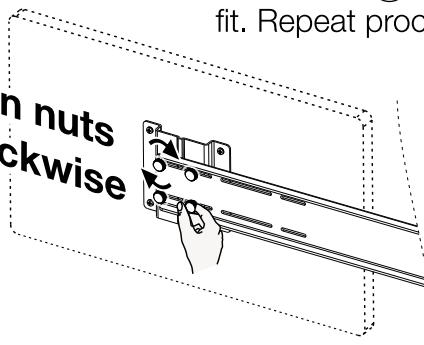

Angle adjustment

www.kondator.se


Assembly Guide

STEP 6

Use 14 mm wrench to tighten the bar to a vertical position. Hold it up to the desired position and use the VESA bracket or Duo Bar as a gripping surface to counter the force of the wrench and gravity.

! DO NOT SKIP THIS STEP.

Be sure to tighten the hexagonal nut to be sure that it is tightened until fully rigid.

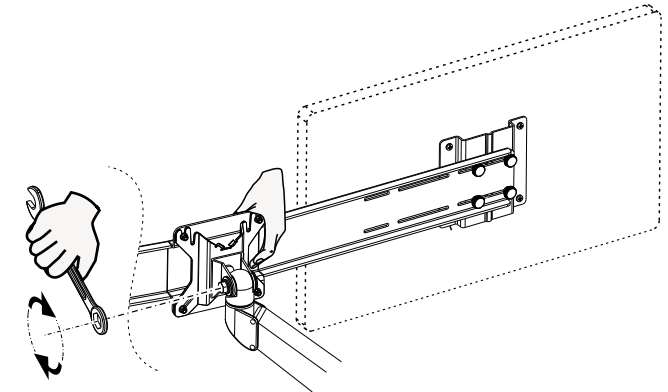

Tension Adjustment

Caution:

Support and hold on to the arm while adjusting the tension.

Adjustment:

Use the Allen key provided to adjust the tension to correspond to the weight of the desired monitor. Turn the Allen key (4) counter-clockwise to adjust for heavier monitors; clockwise for lighter monitors. Once the adjustment is done, the monitor should be experienced as weightless and the monitor should remain in any position without dropping nor rising. Tighten joint using wrench (not included).

Recommendations:

- 8-14 kg (17.6-30.8 lbs).
- The products loading capacities are based on monitors' center of gravity less than 3 cm from the end of the VESA interface.
- Loading capacity could be reduced if the monitor size is greater than 26 inches or if the thickness exceeds 5.5 cm.
- All product specifications in catalogues are subject to change without notice.

