

Axessline Popup


935-P2DC




CE CERTIFIED ACCORDING TO CE STANDARD

Full configuration for conference


Includes terminal strips that are integrated into the PopUp, which allows for easy mounting in desktop and cabinet furniture. A practical option in both the office and home environments.

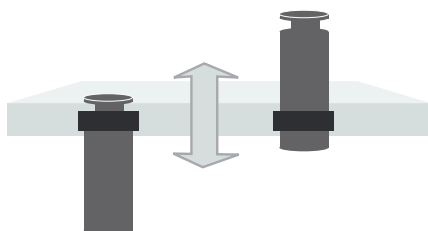

Easily "pop up" the unit.



CUT OUT IN TABLETOP
 Ø 80 MM
 PRODUCT
 Ø 90 MM

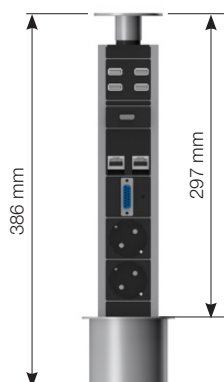

- 2 POWER
- 2 USB-PORTS
- 2 DATA
- 1 VGA/AUDIO
- 1 HDMI

SPECIFICATIONS

- 2 Power, 2 data, 2 USB-ports, 1 VGA/Audio, 1 HDMI
- Hole diameter 80 mm
- 250 V, 16 A, Max 3500 W. Grounded.
- Cables:
 - 1 x 1.0 m Wieland-cable
 - 2 x 0.9 m Data port (RJ45, CAT6)
 - 2 x 0.9 m USB B
 - 1 x 0.9 m VGA with Audio
 - 1 x 0.9 m HDMI
- Part no. 935-P2DC