

ADDITIONAL INFORMATION:

by KONDATOFF

| TITLE / IDENTIFICATION |
|------------------------|
|------------------------|

LiftPipe - 650 mm

DRAWING NUMBER

| | | |
|-------------------|------------|-----------------------|
| MATERIAL | STEEL | SURFACE TREATMENT |
| SCALE | #A4 | WEIGHT (KG) |
| DATE (YYYY-MM-DD) | 2017-03-07 | REV.DATE (YYYY-MM-DD) |
| REVISION | A | SHEET 1/2 |


| ARTICLE NUMBER / REFERENCE |
|----------------------------|
|----------------------------|

429-PI01


Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

| # | PART NUMBER | QTY | NOTES |
|---|--------------------------------|-----|-------|
| 1 | LIFTPipe_PI01_TRAY | 1 | |
| 2 | LIFTPipe_BRACKET HOLDER | 1 | |
| 3 | LIFTPipe_TABLE_BRACKET_TYPE_A | 1 | |
| 4 | POP_RIVET | 6 | |
| 5 | PANHEAD_POZIDRIVE_Z2_SPAX_4X16 | 4 | |

Part #1 and part #2
need to be assembled
with six rivets (part #4).

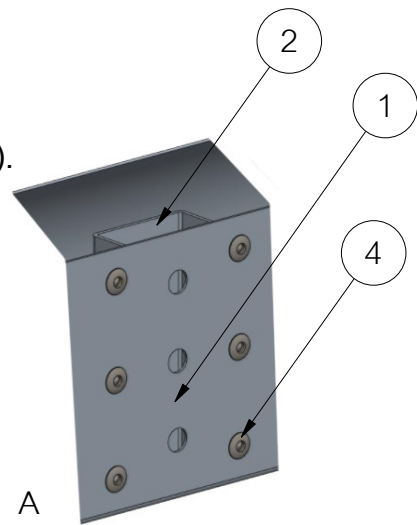

FULL ASSEMBLY
SCALE 0.250

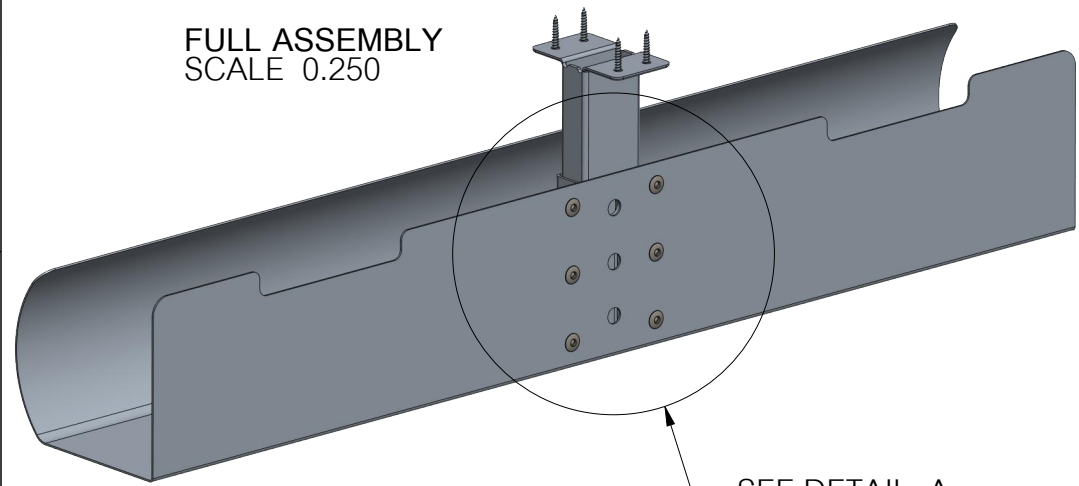

SEE DETAIL A

DETAIL A
SCALE 0.350

ADDITIONAL INFORMATION:

DEBURR ALL SHARP EDGES
AND CORNERS.

NOTE! INSTRUCTIONS BELOW,
UNLESS SPECIFIED IN DRAWING:

ALL DIMENSIONS IN MILLIMETERS.
TOLERANCES: ±0.1 MM
 ±0.01 MM
 ±0.005 MM
 ±1 DEGREES

THREAD TOLERANCE GRADE: MEDIUM
FEMALE/INTERNAL: 6H
MALE/EXTERNAL: 6g



| | |
|------------------------|----------------------------|
| TITLE / IDENTIFICATION | |
| LiftPipe - 650 mm | |
| DRAWING NUMBER | ARTICLE NUMBER / REFERENCE |
| | 429-PI01 |

| | | | |
|-------------------|------------|-----------------------|-----|
| MATERIAL | STEEL | SURFACE TREATMENT | |
| SCALE | #A4 | WEIGHT (KG) | |
| DATE (YYYY-MM-DD) | 2017-03-07 | REV.DATE (YYYY-MM-DD) | |
| REVISION | A | SHEET | 2/2 |