


Axessline Popup

935-P2DC




Full configuration for conference


Includes terminal strips that are integrated into the PopUp, which allows for easy mounting in desktop and cabinet furniture. A practical option in both the office and home environments.

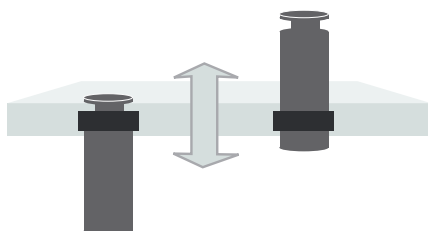






Easily "popup" the unit.

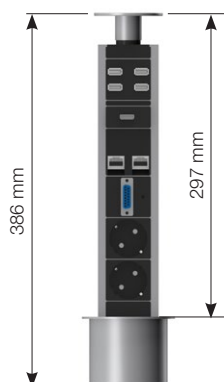

CUT OUT IN TABLETOP
 Ø 80 MM
 PRODUCT
 Ø 90 MM



-  2 POWER
-  2 USB-PORTS
-  2 DATA
-  1 VGA/AUDIO
-  1 HDMI

SPECIFICATIONS

- 2 Power, 2 data, 2 USB-ports, 1 VGA/Audio, 1 HDMI
- Hole diameter 80 mm
- 250 V, 16 A, Max 3500 W. Grounded.
- Cables:
 - 1 x 1.0 m Wieland-cable
 - 2 x 0.9 m Data port (RJ45, CAT6)
 - 2 x 0.9 m USB B
 - 1 x 0.9 m VGA with Audio
 - 1 x 0.9 m HDMI
- Part no. 935-P2DC


Axessline Popup

935-P2DU




Access to power, data and USB


Includes terminal strips that are integrated into the PopUp, which allows for easy mounting in desktop and cabinet furniture. A practical option in both the office and home environments. With a simple press on the top the power bar is easily lifted to its open position.

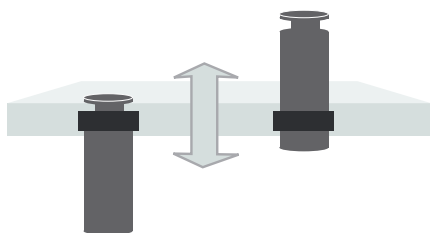

Easily "popup" the unit.



CUT OUT IN TABLETOP
 Ø 60 MM
 PRODUCT
 Ø 70 MM

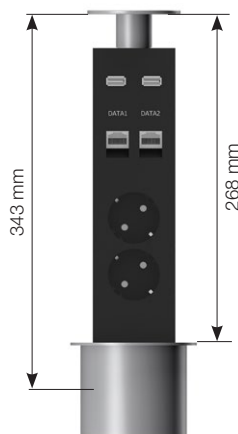

2 POWER



2 USB-PORTS



2 DATA

SPECIFICATIONS

- 2 Power, 2 data, 2 USB-ports
- Hole diameter 80 mm
- 250 V, 16 A, Max 3500 W. Grounded.
- Cables:
 - 1 x 1.5 m Schuko-cable
 - 2 x 0.5 m Data port (RJ45, CAT6)
 - 1 x 0.3 m USB B
- Part no. 935-P2DU


Axessline Popup

935-P630




Access to power, data and USB


Includes terminal strips that are integrated into the PopUp, which allows for easy mounting in desktop and cabinet furniture. A practical option in both the office and home environments. With a simple press on the top the power bar is easily lifted to its open position.

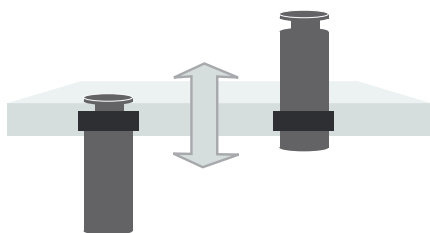

Easily "popup" the unit.



CUT OUT IN TABLETOP
 Ø 60 MM
 PRODUCT
 Ø 70 MM

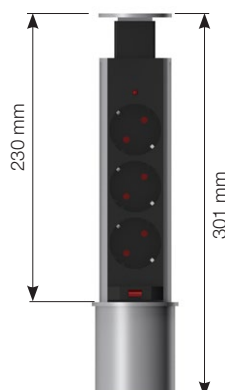

3 POWER

SPECIFICATIONS

- 2 Power, 2 data, 2 USB-ports
- Level locking
- Hole diameter 80 mm
- 250 V, 16 A, Max 3500 W. Grounded.
- Cables:
 - 1 x 1.5 m Schuko-cable
 - 2 x 0.5 m Data port (RJ45, CAT6)
 - 1 x 0.3 m USB B
- Part no. 935-P630


Axessline Popup

935-P63U




Access to power, data and USB


Includes terminal strips that are integrated into the PopUp, which allows for easy mounting in desktop and cabinet furniture. A practical option in both the office and home environments. With a simple press on the top the power bar is easily lifted to its open position.

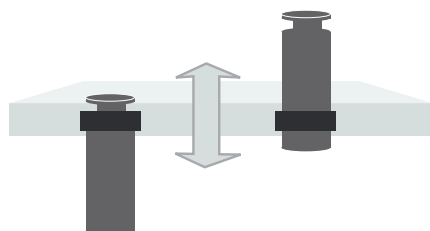

Easily "popup" the unit.



CUT OUT IN TABLETOP
 Ø 60 MM
 PRODUCT
 Ø 70 MM

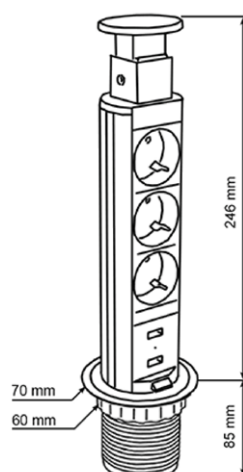

CE CERTIFIED ACCORDING
 TO CE STANDARD



3 POWER



2 USB-CHARGER

SPECIFICATIONS

- 2 Power, 2 USB-chargers
5 V, 2.1 A max
- Level locking
- Hole diameter 60 mm
- 250 V, 16 A, Max 3500 W.
Grounded.
- Cables:
 - 1 x 1.5 m Schuko-cable
 - 1 x 0.3 m USB B
- Part no. 935-P63U